



# SIoux LOOKOUT

## Hub of the North

The Corporation of the  
Municipality of Sioux Lookout  
85 King Street, P.O. Box 1377  
Sioux Lookout, Ontario • P8T 1B9  
Telephone: (807) 737-1994  
Facsimile: (807) 737-4624  
www.siouxlookout.ca

## INFRASTRUCTURE & PUBLIC WORKS

### ADDENDUM #1

### Q013-2024 – Asphalt Overlay

June 28, 2024

#### REVISION TO RFQ

##### Revision #1

Delete 1.2.5 of Section 00 01 00 – Instruction to Bidders, in its entirety and replace with the following:

- .5 Offers will be opened **privately**, immediately after in Council Chambers at the Municipal Office, as indicated above
- .1 Offers will be opened at 3:00:00 PM CST local time on the same day

#### QUESTIONS

1. On page three of section 00 41 13 the bid form indicates manhole and water valve box adjustments. Does this include Catch basins as well or will they remain in place?
  - A. Only manholes and water valves require adjustments. No vertical alignment changes will be performed to concrete infrastructure requiring adjustments to catch basins. It is estimated the following adjustments are required.

Front St:	5 MH, 9 Valves
Third Ave:	3 MH, 2 Valves
2. On page three of section 00 41 13 can you identify the areas where asphalt will be reclaimed?
  - A. As identified in Section 02 41 13.13 – Paving Removal, the contractor will be required to perform a partial-depth removal adjacent to the curbs, at a width they shall determine. Likewise the contractor is to perform partial depth transitions at the terminal end of the project extents. Potentially, the contractor is to remove asphalt, if required, to facilitate adjustments to manholes and water valves.



# SHIUX LOOKOUT

## Hub of the North


The Corporation of the  
Municipality of Sioux Lookout  
85 King Street, P.O. Box 1377  
Sioux Lookout, Ontario • P8T 1B9  
Telephone: (807) 737-1994  
Facsimile: (807) 737-4624  
www.siouxlookout.ca

### INFRASTRUCTURE & PUBLIC WORKS

3. On page 8 of section 32 12 16 - 3.5 Placing 0.2 - Final compacted in-place elevation shall be 10mm at concrete lip of gutter. Does this indicate the overlay will be terminated at the edge of the concrete gutter or allow 10mm of asphalt at the gutter flowline?

- A. The contractor is to place asphalt, considering the compaction factor for their asphalt, such that the final compacted, in-place elevation is 10mm higher than that of the lip of gutter. The depth of cut is determined by their desired thickness, which is a minimum of 2.5 times the nominal aggregate size, taking into consideration that part of that thickness is 10 mm above the lip of gutter.

The reasoning behind the request is to ensure water is channelized along gutters towards catch basins, and to protect curbs from winter maintenance strikes from machines. The contractor should be advised the concrete gutters on Front Avenue are in poor condition, so the Contractor is to perform the work to the best of their abilities for existing conditions.

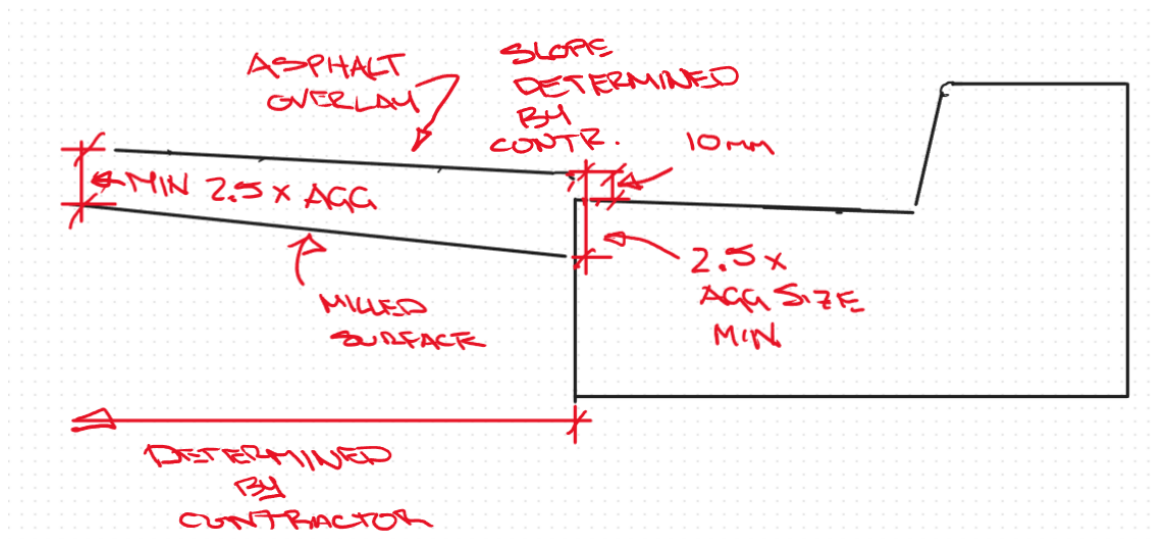

4. Will street closures and detours be allowed for the duration of the work?
- A. Traffic should remain open for local traffic during non-paving operations. Several businesses on the south side of Front Street require access during normal business hours. Likewise, Centennial Drive off 3rd Avenue would require access to residences.

During asphalt paving operations street closures are permitted. The contractor should demonstrate how they intend to maintain access, at



# SIoux LOOKOUT

## Hub of the North

The Corporation of the  
Municipality of Sioux Lookout  
85 King Street, P.O. Box 1377  
Sioux Lookout, Ontario • P8T 1B9  
Telephone: (807) 737-1994  
Facsimile: (807) 737-4624  
[www.siouxlookout.ca](http://www.siouxlookout.ca)

### INFRASTRUCTURE & PUBLIC WORKS

least foot access to Front Street businesses, and ensure operations are performed quickly when submitting a traffic plan.

5. Does this contract include line painting?

A. Pavement marking is not included in the scope of work